

CB24




Bridge Specifications

The CB24 is a construction vehicle bridge designed to take a safe working load of up to 45 tonne. It has unique ability which include, it is quick to install, has a exceptional live load / dead weight ratio reducing crane cost. It can be used in many and varied applications. The bridge will arrive on one articulated trailer in sections put together to make two 'planks'. Once assembled each 'plank' is lifted into the final position.

Data

Overall width (not separated).....	3.7m	Width of each unit.....	1.85m
Internal width (not separated).....	3.2m	Minimum bank support.....	1m
Internal width (separated with a non weight bearing strip).....	4.0m		
Overall weight of both sections.....	16tonne	Weight of each unit.....	8tonne

Overall length 24.4m

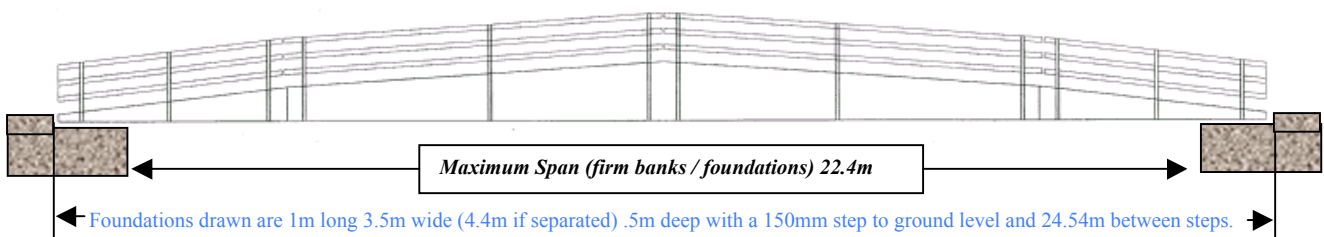

Mitchell Bridges Limited
 Telephone: 01962 885040
 Fax: 01962 882305
 London Road
 Kingsworthy
 Winchester
 Hampshire SO23 7QN

Engineering since 1970

Directors: P R MITCHELL, C R MITCHELL
 Registered No. 02084498 England

Why not visit our web site
www.temporarybridges.com